

DP router cutters with shear angle



Saw blades

Tools with bore & Knives

Router Bits & Sets

CNC Router Cutter & Chucks

Industrial Dowel Drills

Bits for Hand Power Tools

Spare Parts

Power Tools & Accessories

Display Cabinets



141

DP Z1+1 Z1 RH

D mm	I mm	L mm	S mm	Z	ORDER NO. Right-hand rotation
6	8	65	12x40	1	141.060.61
8	12	65	12x40	1	141.080.61
*10	22	75	12x40	1+1	141.101.61

TECHNICAL DETAILS:

- Super strength steel
- DP cutting edge
- HW plunging tip for diagonal plunge-cutting
- Resharpenable cutter (max 3 times)
- Max feed speed 4 m/min

40X
LONGER LIFE
THAN CARBIDE

APPLICATION: to be used on all CNC routers for jointing and sizing of solid wood and wood-based panels

*** Z1+1
CONSTRUCTION
FOR 141.101.61
ITEM**



DP router cutters with shear angle



140

DP Z1+1 RH

D mm	I mm	L mm	S mm	Z	ORDER NO. Right-hand rotation
12	27	75	12x40	1+1 (3 DP+1 HW)	140.120.61
12	35	84	12x40	1+1 (4 DP+1 HW)	140.121.61
12,7	27	75	12,7x40	1+1 (3 DP+1 HW)	140.127.61
12,7	35	84	12,7x40	1+1 (4 DP+1 HW)	140.128.61
15,87	27	87	15,87x50	1+1 (3 DP+1 HW)	140.158.61
15,87	44	103	15,87x50	1+1 (5 DP+1 HW)	140.159.61
16	27	87	16x50	1+1 (3 DP+1 HW)	140.160.61
16	35	95	16x50	1+1 (4 DP+1 HW)	140.161.61
18	27	87	20x50	1+1 (3 DP+1 HW)	140.180.61
18	35	95	20x50	1+1 (4 DP+1 HW)	140.181.61
18	44	103	20x50	1+1 (5 DP+1 HW)	140.182.61
19,05	27	87	19,05x50	1+1 (3 DP+1 HW)	140.190.61
19,05	44	103	19,05x50	1+1 (5 DP+1 HW)	140.192.61
20	27	87	20x50	1+1 (3 DP+1 HW)	140.200.61
20	35	95	20x50	1+1 (4 DP+1 HW)	140.201.61
20	44	103	20x50	1+1 (5 DP+1 HW)	140.202.61
20	53	112	20x50	1+1 (6 DP+1 HW)	140.203.61


TECHNICAL DETAILS:

- Super strength steel
- DP cutting edge
- HW plunging tip for diagonal plunge-cutting (Z-axis tool entrance)
- Resharpenable cutter (max 3 times)
- Max feed speed 5 m/min

40X
LONGER LIFE
THAN CARBIDE

APPLICATION: to be used on all CNC routers for jointing, rabbeting, grooving and copying of raw material, melamine and laminates, MDF, HPL and veneered panels.

DP router cutters with shear angle

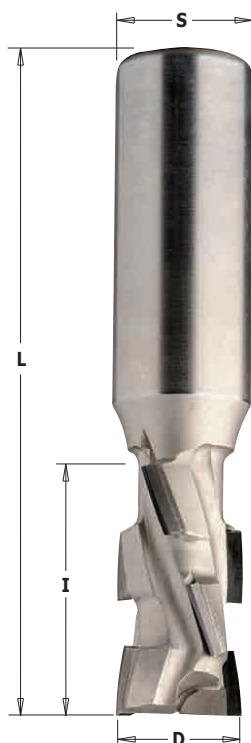

142

DP Z2+2 RH

D mm	I mm	L mm	S mm	Z	ORDER NO. Right-hand rotation
20	27	85	20x50	2+2 (6 DP+1 HW)	142.200.61
20	36	95	20x50	2+2 (8 DP+1 HW)	142.201.61
20	45	105	20x50	2+2 (10 DP+1 HW)	142.202.61
20	54	115	20x50	2+2 (12 DP+1 HW)	142.203.61

TECHNICAL DETAILS:

- Super strength steel
- DP cutting edge
- HW plunging tip for diagonal plunge-cutting (Z-axis tool entrance)
- Resharpenable cutter (max 3 times)
- Max feed speed 10 m/min

40X
LONGER LIFE
THAN CARBIDE

APPLICATION: to be used on all CNC routers for jointing, rabbeting, grooving, copying and dividing cuts of raw material, melamine and laminates, MDF, HPL and veneered panels.

Saw blades

Tools with bore & Knives

Router Bits & Sets

CNC Router Cutter & Chucks

Industrial Dowel Drills


Bits for Hand Power Tools

Spare Parts

Power Tools & Accessories

Display Cabinets

DP spiral router cutters with shear angle

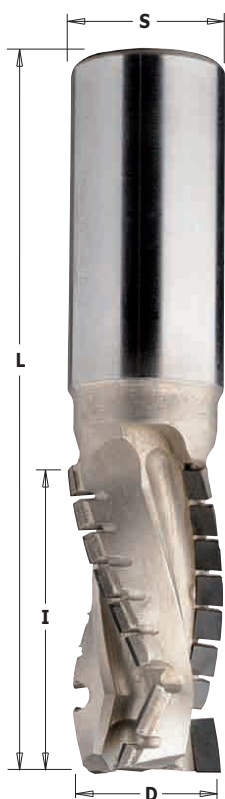

143

DP Z3 RH

D mm	I mm	L mm	S mm	Z	ORDER NO. Right-hand rotation
22	30	90	25x50	3 (12 DP+1 HW)	143.220.61
□ 22	35	95	25x50	3 (15 DP+1 HW)	143.221.61
22	40	100	25x50	3 (18 DP+1 HW)	143.222.61
□ 22	45	105	25x50	3 (20 DP+1 HW)	143.223.61
22	50	110	25x50	3 (21 DP+1 HW)	143.224.61
□ 22	55	115	25x50	3 (24 DP+1 HW)	143.225.61
22	60	120	25x50	3 (27 DP+1 HW)	143.226.61
□ 22	65	125	25x50	3 (29 DP+1 HW)	143.227.61
□ 22	70	130	25x50	3 (30 DP+1 HW)	143.228.61

TECHNICAL DETAILS:

- Super strength steel
- DP cutting edge
- HW plunging tip for diagonal plunge-cutting (Z-axis tool entrance)
- Resharpenable cutter (max 6 times)
- Max feed speed 25 m/min

40X
LONGER LIFE
THAN CARBIDE

APPLICATION: to be used on all CNC routers for jointing, rabbeting, grooving, copying and dividing cuts of raw material, melamine and laminates, MDF, HPL and veneered panels. High performance on pre-and finish-routing.

□ On request